

Chapter 3

Machine-Level Programming I: Basics

Machine Programming I: Basics

- History of Intel processors and architectures
- C, assembly, machine code
- Assembly Basics: Registers, operands, move
- Arithmetic & logical operations

Intel x86 Evolution: Milestones


<i>Name</i>	<i>Date</i>	<i>Transistors</i>	<i>MHz</i>
■ 8086	1978	29K	5-10
<ul style="list-style-type: none">■ First 16-bit Intel processor. Basis for IBM PC & DOS■ 1MB address space			
■ 386	1985	275K	16-33
<ul style="list-style-type: none">■ First 32 bit Intel processor, referred to as IA32■ Added “flat addressing”, capable of running Unix			
■ Pentium 4E	2004	125M	2800-3800
<ul style="list-style-type: none">■ First 64-bit Intel x86 processor, referred to as x86-64			
■ Core 2	2006	291M	1060-3500
<ul style="list-style-type: none">■ First multi-core Intel processor			
■ Core i7	2008	791M	1700-3900
<ul style="list-style-type: none">■ Four cores			
■ Core i9	2017	1.7G	4900-5200
<ul style="list-style-type: none">■ Eight cores			

Intel x86 Processors, cont.

■ Machine Transistors (Moore's Law)


■ 386	1985	0.3M
■ Pentium	1993	3.1M
■ Pentium/MMX	1997	4.5M
■ PentiumPro	1995	6.5M
■ Pentium III	1999	8.2M
■ Pentium 4	2001	42M
■ Core 2 Duo	2006	291M
■ Core i7	2008	731M
■ Core i9	2017	1.7G

<https://semiconductor.substack.com/p/the-relentless-pursuit-of-moores>

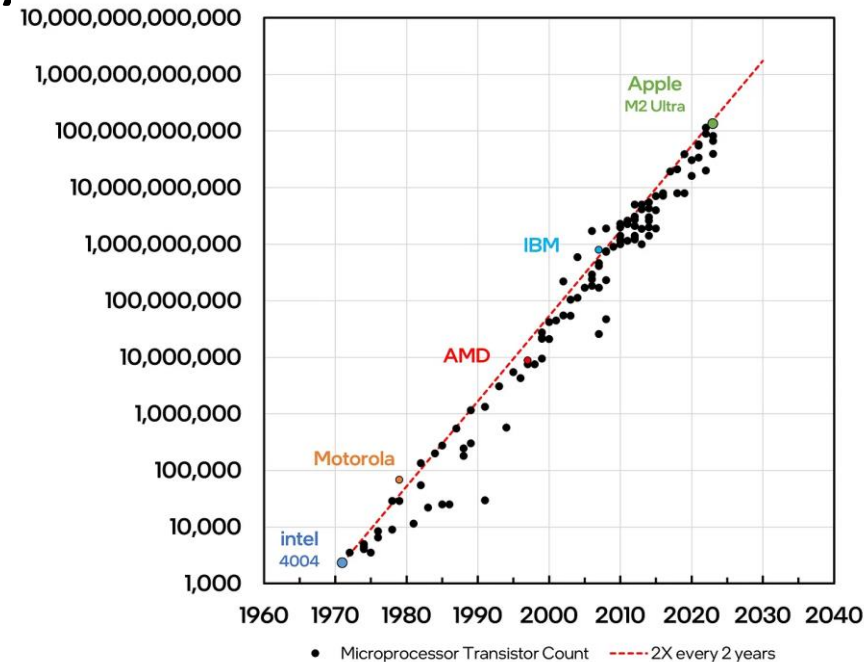

■ Added Features

- Instructions to support multimedia ops
- Instructions to enable more efficient conditional operations
- Transition from 32 bits to 64 bits
- More cores

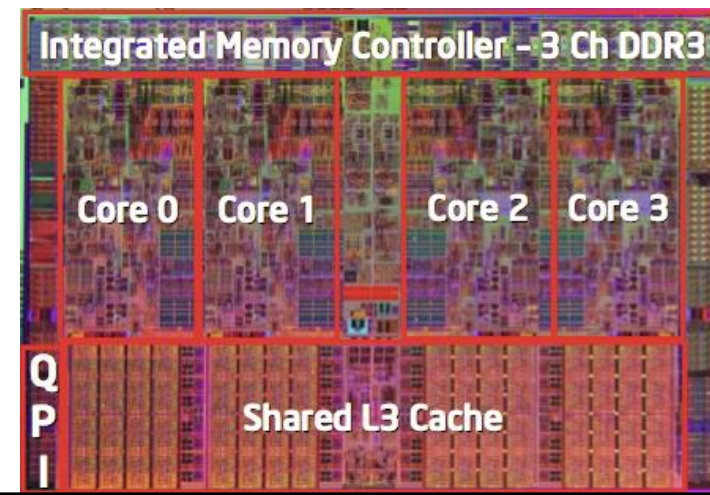

Recent Architecture


- Core i7 Broadwell 2015

■ Desktop Model

- 4 cores
- Integrated graphics
- 3.3-3.8 GHz
- 65W

■ Server Model

- 8 cores
- Integrated I/O
- 2-2.6 GHz
- 45W

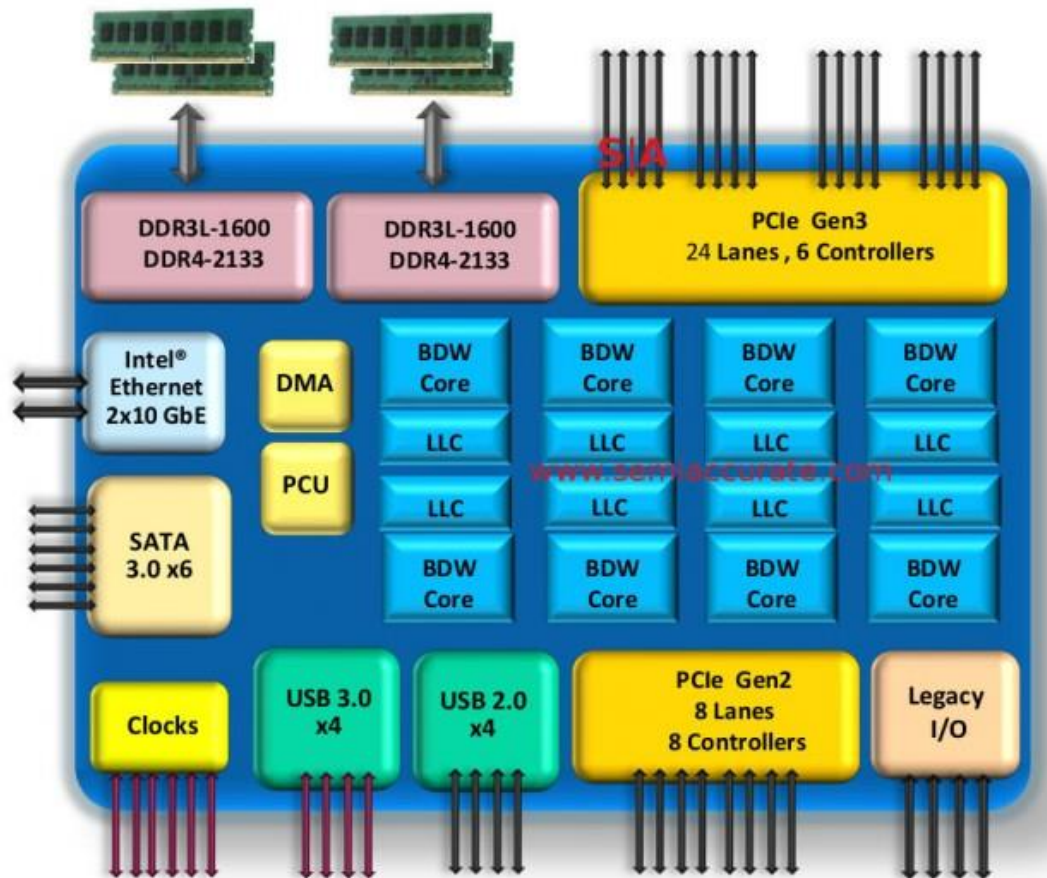

x86 Clones: Advanced Micro Devices (AMD)

■ Historically

- AMD has followed just behind Intel
- A little bit slower, a lot cheaper

■ Then

- Recruited top circuit designers from Digital Equipment Corp. and other downward trending companies
- Built Opteron: tough competitor to Pentium 4
- Developed x86-64, their own extension to 64 bits

■ Recent Years

- Intel got its act together
 - Leads the world in semiconductor technology
- AMD has fallen behind
 - Relies on external semiconductor manufacturer

Intel's 64-Bit History

- **2001: Intel Attempts Radical Shift from IA32 to IA64**
 - Totally different architecture (Itanium)
 - Executes IA32 code only as legacy
 - Performance disappointing
- **2003: AMD Steps in with Solution**
 - x86-64 (now called “AMD64”)
- **Intel Felt Obligated to Focus on IA64**
 - Hard to admit mistake or that AMD is better
- **2004: Intel Announces EM64T extension to IA32**
 - Extended Memory 64-bit Technology
 - Almost identical to x86-64!
- **All but low-end x86 processors support x86-64**
 - But, lots of code still runs in 32-bit mode

Our Coverage

■ IA32

- The traditional x86

■ x86-64

- The standard
- `gcc hello.c`
- `gcc -m64 hello.c`

■ Presentation

- Book covers x86-64
- Web aside on IA32
- We will only cover x86-64

Machine Programming I: Basics

- History of Intel processors and architectures
- **C, assembly, machine code**
- Assembly Basics: Registers, operands, move
- Arithmetic & logical operations

Definitions

■ Architecture

- also ISA: instruction set architecture
- The parts of a processor design that one needs to understand to write assembly/machine code.
- Examples: instruction set specification, registers.

■ Microarchitecture

- Implementation of the architecture.
- Examples: cache sizes and core frequency.


■ Code Forms

- Machine Code: The byte-level programs that a processor executes
- Assembly Code: A text representation of machine code

■ Example ISAs

- Intel: x86, IA32, Itanium, x86-64
- ARM: Used in almost all mobile phones

Assembly/Machine Code View

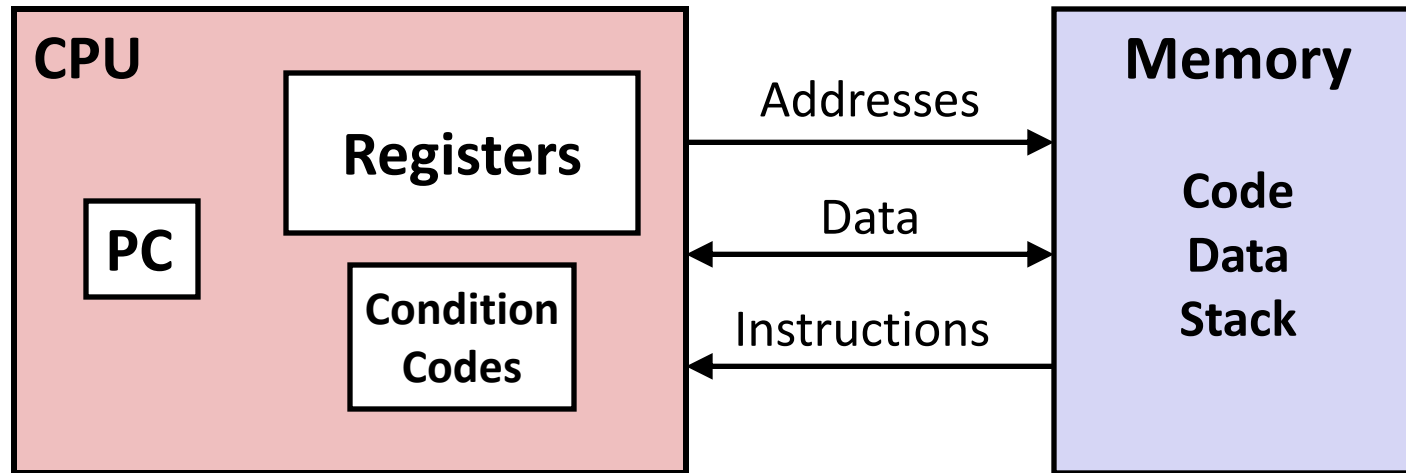

Programmer-Visible State

■ PC: Program counter

- Address of next instruction
- Called “RIP” (x86-64)

■ Register file

- Heavily used program data

■ Condition codes


- Store status information about most recent arithmetic or logical operation
- Used for conditional branching

■ Memory

- Byte addressable array
- Code and user data
- Stack to support procedures

Turning C into Object Code

- Code in files `p1.c` `p2.c`
- Compile with command: `gcc -Og p1.c p2.c -o p`
 - Use basic optimizations (`-Og`) [New to recent versions of GCC]
 - Put resulting binary in file `p`

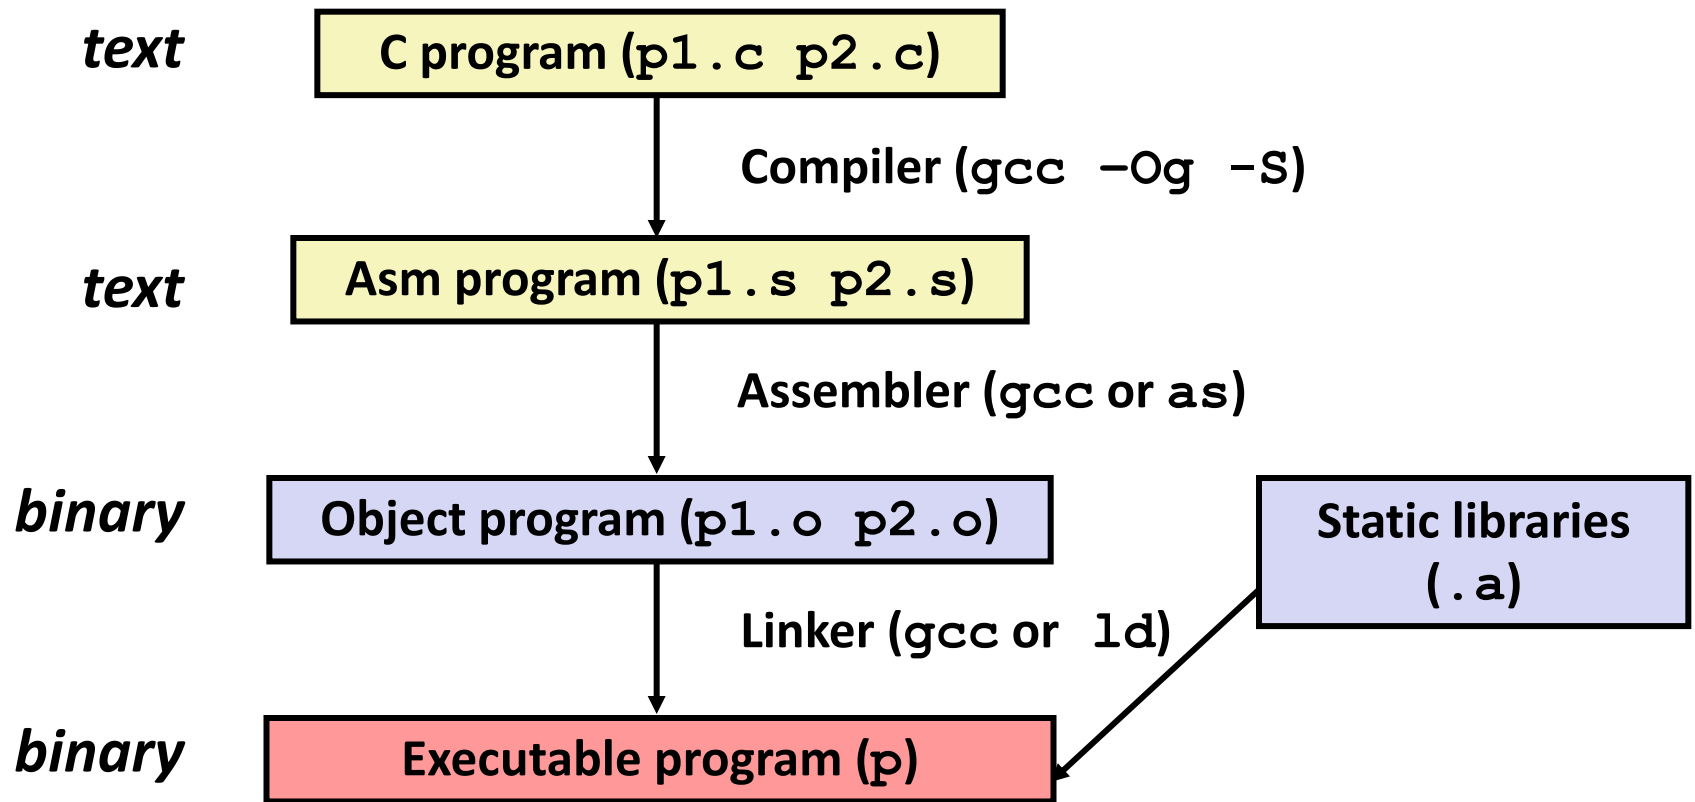

Compiling Into Assembly

C Code (sum.c)

```
long plus(long x, long y);

void sumstore(long x, long y,
              long *dest)
{
    long t = plus(x, y);
    *dest = t;
}
```

Generated x86-64 Assembly

```
sumstore:
    pushq    %rbx
    movq     %rdx, %rbx
    call     plus
    movq     %rax, (%rbx)
    popq     %rbx
    ret
```

Obtain with command

```
gcc -Og -S sum.c
```

Produces file `sum.s`

Warning: May get very different results on other types of machines (Andrew Linux, Mac OS-X, ...) due to different versions of gcc and different compiler settings.

Assembly Characteristics: Data Types

- **“Integer” data of 1, 2, 4, or 8 bytes**
 - Data values
 - Addresses (untyped pointers)
- **Floating point data of 4, 8, or 10 bytes**
- **Code: Byte sequences encoding series of instructions**
- **No aggregate types such as arrays or structures**
 - Just contiguously allocated bytes in memory

Assembly Characteristics: Operations

- **Perform arithmetic function on register or memory data**
- **Transfer data between memory and register**
 - Load data from memory into register
 - Store register data into memory
- **Transfer control**
 - Unconditional jumps to/from procedures
 - Conditional branches

Object Code

Code for `sumstore`

0x0400595:

0x53

0x48

0x89

0xd3

0xe8

0xf2

0xff

0xff

0xff

0x48

0x89

0x03

0x5b

0xc3

- Total of 14 bytes
- Each instruction 1, 3, or 5 bytes
- Starts at address 0x0400595

■ Assembler

- Translates `.s` into `.o`
- Binary encoding of each instruction
- Nearly-complete image of executable code
- Missing linkages between code in different files

■ Linker

- Resolves references between files
- Combines with static run-time libraries
 - E.g., code for `malloc`, `printf`
- Some libraries are *dynamically linked*
 - Linking occurs when program begins execution

Machine Instruction Example

```
*dest = t;
```

```
movq %rax, (%rbx)
```

```
0x40059e:  48 89 03
```

■ C Code

- Store value `t` where designated by `dest`

■ Assembly

- Move 8-byte value to memory
 - Quad words in x86-64 parlance
- Operands:
 - `t`: Register `%rax`
 - `dest`: Register `%rbx`
 - `*dest`: Memory `M[%rbx]`

■ Object Code

- 3-byte instruction
- Stored at address `0x40059e`

Disassembling Object Code

Disassembled

```
0000000000400595 <sumstore>:
 400595: 53                push    %rbx
 400596: 48 89 d3          mov     %rdx,%rbx
 400599: e8 f2 ff ff ff   callq   400590 <plus>
 40059e: 48 89 03          mov     %rax, (%rbx)
 4005a1: 5b                pop     %rbx
 4005a2: c3                retq
```

■ Disassembler

`objdump -d sum`

- Useful tool for examining object code
- Analyzes bit pattern of series of instructions
- Produces approximate rendition of assembly code
- Can be run on either a `.out` (complete executable) or `.o` file

Alternate Disassembly

Object

0x0400595:

0x53

0x48

0x89

0xd3

0xe8

0xf2

0xff

0xff

0xff

0x48

0x89

0x03

0x5b

0xc3

Disassembled

Dump of assembler code for function sumstore:

```
0x0000000000400595 <+0>: push    %rbx
0x0000000000400596 <+1>: mov     %rdx,%rbx
0x0000000000400599 <+4>: callq  0x400590 <plus>
0x000000000040059e <+9>: mov     %rax, (%rbx)
0x00000000004005a1 <+12>: pop     %rbx
0x00000000004005a2 <+13>: retq
```

■ Within gdb Debugger

`gdb sum`

`disassemble sumstore`

■ `Disassemble procedure`

`x/14xb sumstore`

■ `Examine the 14 bytes starting at sumstore`

What Can be Disassembled?

```
% objdump -d WINWORD.EXE
```

```
WINWORD.EXE:      file format pei-i386
```

```
No symbols in "WINWORD.EXE".
```

```
Disassembly of section .text:
```

```
30001000 <.text>:
```

```
30001000:
```

```
30001001:
```

```
30001003:
```

```
30001005:
```

```
3000100a:
```

**Reverse engineering forbidden by
Microsoft End User License Agreement**

- Anything that can be interpreted as executable code
- Disassembler examines bytes and reconstructs assembly source

Machine Programming I: Basics

- History of Intel processors and architectures
- C, assembly, machine code
- **Assembly Basics: Registers, operands, move**
- Arithmetic & logical operations


x86-64 Integer Registers

%rax	%eax
%rbx	%ebx
%rcx	%ecx
%rdx	%edx
%rsi	%esi
%rdi	%edi
%rsp	%esp
%rbp	%ebp

%r8	%r8d
%r9	%r9d
%r10	%r10d
%r11	%r11d
%r12	%r12d
%r13	%r13d
%r14	%r14d
%r15	%r15d

- Can reference low-order 4 bytes (also low-order 1 & 2 bytes)

Some History: IA32 Registers

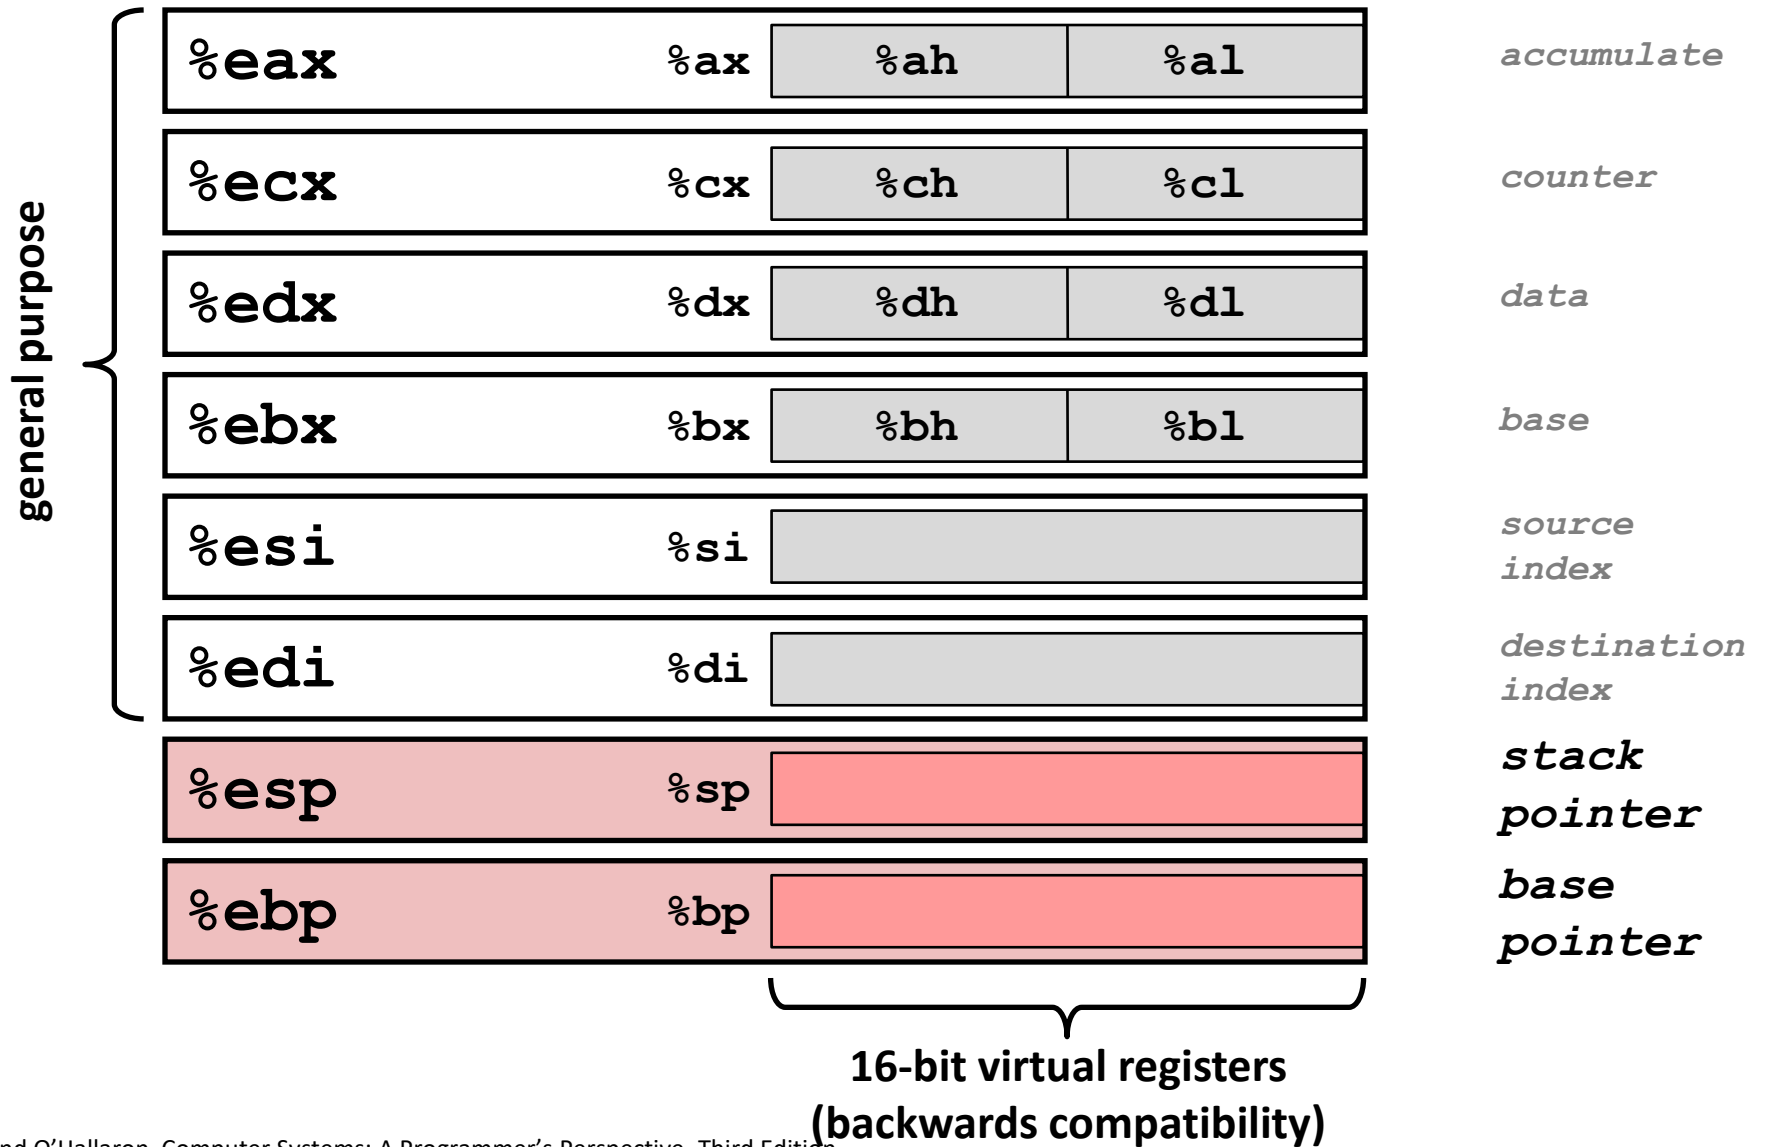

Moving Data

■ Moving Data

`movq Source, Dest:`

■ Operand Types

- **Immediate:** Constant integer data
 - Example: `$0x400`, `$-533`
 - Like C constant, but prefixed with ``$'`
 - Encoded with 1, 2, or 4 bytes
- **Register:** One of 16 integer registers
 - Example: `%rax`, `%r13`
 - But `%rsp` reserved for special use
 - Others have special uses for particular instructions
- **Memory:** 8 consecutive bytes of memory at address given by register
 - Simplest example: `(%rax)`
 - Various other “address modes”

`%rax`

`%rcx`

`%rdx`

`%rbx`

`%rsi`

`%rdi`

`%rsp`

`%rbp`

`%rN`

movq Operand Combinations

	Source	Dest	Src, Dest	C Analog
movq	Imm	Reg	movq \$0x4, %rax	temp = 0x4;
		Mem	movq \$-147, (%rax)	*p = -147;
	Reg	Reg	movq %rax, %rdx	temp2 = temp1;
		Mem	movq %rax, (%rdx)	*p = temp;
	Mem	Reg	movq (%rax), %rdx	temp = *p;

Cannot do memory-memory transfer with a single instruction

Simple Memory Addressing Modes

■ Normal (R) Mem[Reg[R]]

- Register R specifies memory address
- Aha! Pointer dereferencing in C

```
movq (%rcx), %rax
```

■ Displacement D(R) Mem[Reg[R]+D]

- Register R specifies start of memory region
- Constant displacement D specifies offset

```
movq 8(%rbp), %rdx
```

Example of Simple Addressing Modes

```
void swap(long *xp, long *yp)
{
    long t0 = *xp;
    long t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

```
swap:
    movq    (%rdi), %rax
    movq    (%rsi), %rdx
    movq    %rdx, (%rdi)
    movq    %rax, (%rsi)
    ret
```


Understanding Swap()

```
void swap (long *xp, long *yp)
{
    long t0 = *xp;
    long t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

Registers

%rdi	
%rsi	
%rax	
%rdx	

Memory

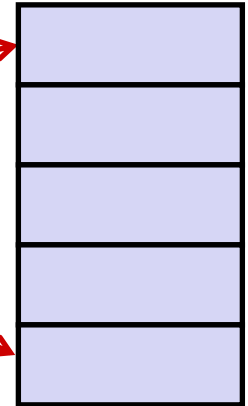

Register	Value
%rdi	xp
%rsi	yp
%rax	t0
%rdx	t1

swap:

```
movq    (%rdi), %rax    # t0 = *xp
movq    (%rsi), %rdx    # t1 = *yp
movq    %rdx, (%rdi)    # *xp = t1
movq    %rax, (%rsi)    # *yp = t0
ret
```

Understanding Swap()

Registers

%rdi	0x120
%rsi	0x100
%rax	
%rdx	


Memory

Address
0x120
123
0x118
0x110
0x108
0x100
456

swap:

```
movq    (%rdi), %rax    # t0 = *xp
movq    (%rsi), %rdx    # t1 = *yp
movq    %rdx, (%rdi)    # *xp = t1
movq    %rax, (%rsi)    # *yp = t0
ret
```


Understanding Swap()

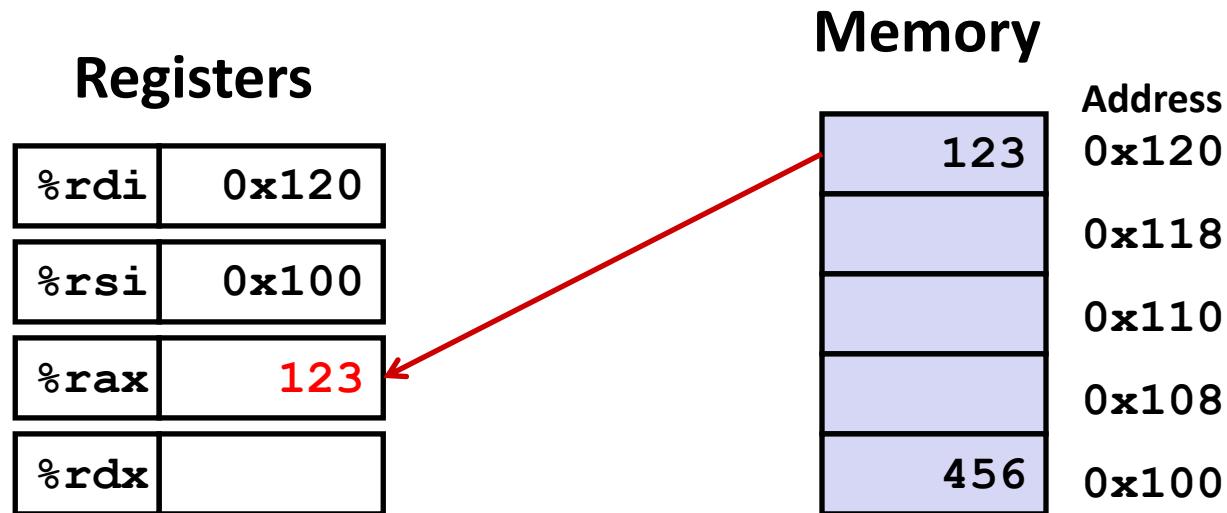

swap:

```
movq    (%rdi), %rax    # t0 = *xp
movq    (%rsi), %rdx    # t1 = *yp
movq    %rdx, (%rdi)    # *xp = t1
movq    %rax, (%rsi)    # *yp = t0
ret
```


Understanding Swap()

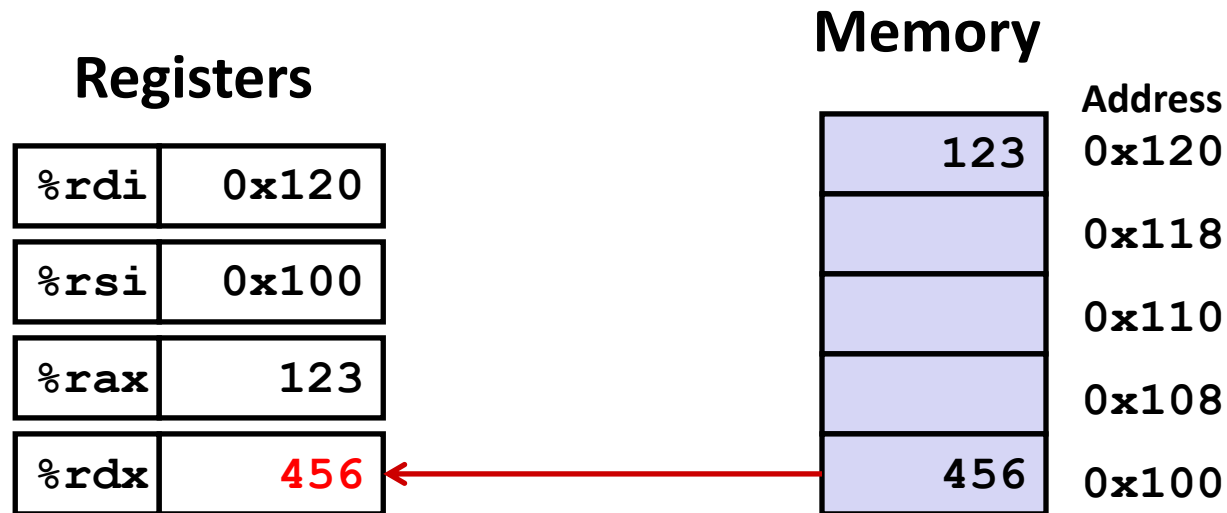

swap:

```
movq    (%rdi), %rax    # t0 = *xp
movq    (%rsi), %rdx    # t1 = *yp
movq    %rdx, (%rdi)    # *xp = t1
movq    %rax, (%rsi)    # *yp = t0
ret
```


Understanding Swap()

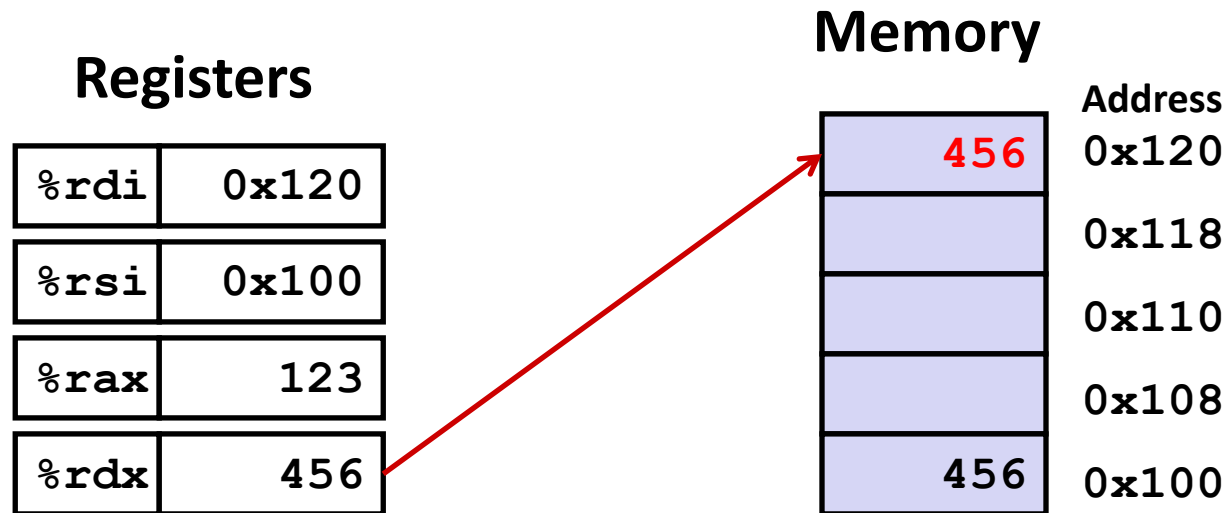

swap:

```
movq    (%rdi), %rax    # t0 = *xp
movq    (%rsi), %rdx    # t1 = *yp
movq    %rdx, (%rdi)    # *xp = t1
movq    %rax, (%rsi)    # *yp = t0
ret
```


Understanding Swap()

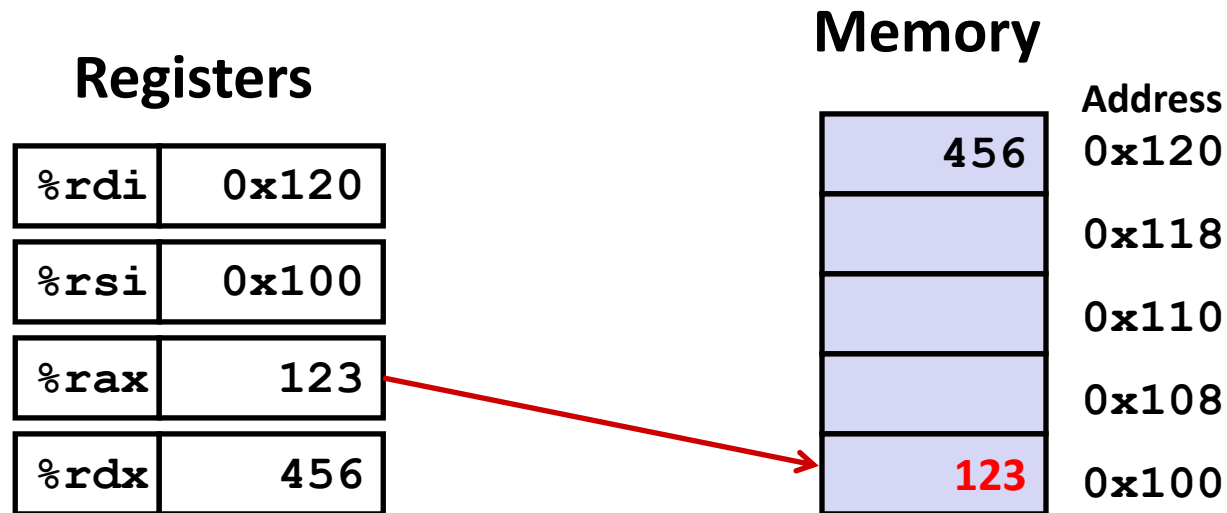

swap:

```
movq    (%rdi), %rax    # t0 = *xp
movq    (%rsi), %rdx    # t1 = *yp
movq    %rdx, (%rdi)    # *xp = t1
movq    %rax, (%rsi)    # *yp = t0
ret
```

Simple Memory Addressing Modes

■ Normal (R) Mem[Reg[R]]

- Register R specifies memory address
- Aha! Pointer dereferencing in C

```
movq (%rcx), %rax
```

■ Displacement D(R) Mem[Reg[R]+D]

- Register R specifies start of memory region
- Constant displacement D specifies offset

```
movq 8(%rbp), %rdx
```

Complete Memory Addressing Modes

■ Most General Form

D(Rb,Ri,S)

Mem[Reg[Rb]+S*Reg[Ri]+ D]

- D: Constant “displacement” 1, 2, or 4 bytes
- Rb: Base register: Any of 16 integer registers
- Ri: Index register: Any, except for %rsp
- S: Scale: 1, 2, 4, or 8 (*why these numbers?*)

■ Special Cases

(Rb,Ri)

Mem[Reg[Rb]+Reg[Ri]]

D(Rb,Ri)

Mem[Reg[Rb]+Reg[Ri]+D]

(Rb,Ri,S)

Mem[Reg[Rb]+S*Reg[Ri]]

Address Computation Examples

<code>%rdx</code>	<code>0xf000</code>
<code>%rcx</code>	<code>0x0100</code>

Expression	Address Computation	Address
<code>0x8 (%rdx)</code>	<code>0xf000 + 0x8</code>	<code>0xf008</code>
<code>(%rdx, %rcx)</code>	<code>0xf000 + 0x100</code>	<code>0xf100</code>
<code>(%rdx, %rcx, 4)</code>	<code>0xf000 + 4*0x100</code>	<code>0xf400</code>
<code>0x80(, %rdx, 2)</code>	<code>2*0xf000 + 0x80</code>	<code>0x1e080</code>

Machine Programming I: Basics

- History of Intel processors and architectures
- C, assembly, machine code
- Assembly Basics: Registers, operands, move
- **Arithmetic & logical operations**

Address Computation Instruction

■ **leaq *Src*, *Dst***

- load effective address quad
- *Src* is address mode expression
- Set *Dst* to address denoted by expression

■ **Uses**

- Computing addresses without a memory reference
 - E.g., translation of **p = &x[i];**
- Computing arithmetic expressions of the form $x + k*y$
 - $k = 1, 2, 4, \text{ or } 8$

■ **Example**

```
long m12(long x)
{
    return x*12;
}
```

Converted to ASM by compiler:

```
leaq (%rdi,%rdi,2), %rax # t <- x+x*2
salq $2, %rax           # return t<<2
```

Some Arithmetic Operations

■ Two-Operand Instructions

<i>Format</i>	<i>Computation</i>	
<code>addq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} + \text{Src}$
<code>subq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} - \text{Src}$
<code>imulq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} * \text{Src}$
<code>salq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} \ll \text{Src}$
<code>sarq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} \gg \text{Src}$
<code>shrq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} \gg \text{Src}$
<code>xorq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} \wedge \text{Src}$
<code>andq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} \& \text{Src}$
<code>orq</code>	<i>Src, Dest</i>	$\text{Dest} = \text{Dest} \text{Src}$

Also called `shlq`

Arithmetic

Logical

■ Watch out for argument order!

■ No distinction between signed and unsigned int (why?)

Some Arithmetic Operations

■ One Operand Instructions

<code>incq</code>	<i>Dest</i>	$Dest = Dest + 1$
<code>decq</code>	<i>Dest</i>	$Dest = Dest - 1$
<code>negq</code>	<i>Dest</i>	$Dest = -Dest$
<code>notq</code>	<i>Dest</i>	$Dest = \sim Dest$

■ See book for more instructions

Arithmetic Expression Example

```
long arith
(long x, long y, long z)
{
    long t1 = x+y;
    long t2 = z+t1;
    long t3 = x+4;
    long t4 = y * 48;
    long t5 = t3 + t4;
    long rval = t2 * t5;
    return rval;
}
```

```
arith:
    leaq    (%rdi,%rsi), %rax
    addq    %rdx, %rax
    leaq    (%rsi,%rsi,2), %rdx
    salq    $4, %rdx
    leaq    4(%rdi,%rdx), %rcx
    imulq    %rcx, %rax
    ret
```

Interesting Instructions

- **leaq**: address computation
- **salq**: shift
- **imulq**: multiplication
 - But, only used once

Understanding Arithmetic Expression

Example

```
long arith
(long x, long y, long z)
{
    long t1 = x+y;
    long t2 = z+t1;
    long t3 = x+4;
    long t4 = y * 48;
    long t5 = t3 + t4;
    long rval = t2 * t5;
    return rval;
}
```

arith:

```
leaq    (%rdi,%rsi), %rax    # t1
addq    %rdx, %rax          # t2
leaq    (%rsi,%rsi,2), %rdx
salq    $4, %rdx            # t4
leaq    4(%rdi,%rdx), %rcx   # t5
imulq   %rcx, %rax          # rval
ret
```

Register	Use(s)
%rdi	Argument x
%rsi	Argument y
%rdx	Argument z
%rax	t1, t2, rval
%rdx	t4
%rcx	t5

Machine Programming I: Summary

■ History of Intel processors and architectures

- Evolutionary design leads to many quirks and artifacts

■ C, assembly, machine code

- New forms of visible state: program counter, registers, ...
- Compiler must transform statements, expressions, procedures into low-level instruction sequences

■ Assembly Basics: Registers, operands, move

- The x86-64 move instructions cover wide range of data movement forms

■ Arithmetic

- C compiler will figure out different instruction combinations to carry out computation