

More C++ : Vectors, Classes, Inheritance, Templates

with content from cplusplus.com, codeguru.com

Vectors

- vectors in C++
 - basically arrays with enhancements
 - indexed similarly
 - contiguous memory
 - some changes
 - defined differently
 - can be resized without explicit memory allocation
 - contains methods, such as size()

2

Vectors

- using vectors
 - must include `<vector>`
 - template, so must be instantiated with type
 - qualified with `std::`

```
std::vector<int> v; // declares a vector of integers
```

- can be simplified in small projects

```
#include <vector>
using namespace std;
//...
vector<int> v; // no need to prepend std:: any more
```

3

C++ Standard Arrays vs. Vectors

```
size_t size = 10;
int sarray[10];
int *darray = new int[size];
// do something with them:
5. for(int i=0; i<10; ++i){
    sarray[i] = i;
    darray[i] = i;
}
// don't forget to delete darray when you're done
10. delete [] darray;
```

```
#include <vector>
//...
size_t size = 10;
std::vector<int> array(size); // make room for 10 integers,
5. // and initialize them to 0
// do something with them:
for(int i=0; i<size; ++i){
    array[i] = i;
}
10. // no need to delete anything
```

4

Vector Length

- previous program does not check for valid index, which enhances performance
- using `at` function will check index

```
std::vector<int> array;
try{
    array.at(1000) = 0;
}
5. catch(std::out_of_range o){
    std::cout<<o.what()<<std::endl;
}
```

5

Vector Length

- vectors can grow
- certain amount of space allocated initially
- once that space runs out, new space is allocated and the values are copied over

```
#include <vector>
#include <iostream>
//...
std::vector<char> array;
5. char c = 0;
while(c != 'x'){
    std::cin>>c;
    array.push_back(c);
}
```

6

Vector Size

- use `pushback(e1)` to grow the size dynamically
- use `resize` to set or reset the size of the array

7

Vector Size

- use the `size()` method for loops

```
for (i = 0; i < array.size(); i++)
    array[i] = 0;
```

8

Classes

- classes
 - fancy struct's
 - expanded concept of data structures
 - _____
 - _____(functions)
- object
 - instantiation of a _____
 - type/variable ⇔ class/object
- defined with keyword **class** (or **struct**)

9

Classes

- members are listed under _____ specifiers
 - private**
 - members accessible only from within the class
 - protected**
 - members accessible to class or _____ classes
 - public**
 - members accessible anywhere the object is visible
- by default, access is _____

10

Classes

- example

```
1 class Rectangle {
2     int width, height;
3     public:
4     void set_values (int,int);
5     int area (void);
6 } rect;
```

- declares a class, **Rectangle**
- declares an object, **rect**
- class contains 4 members
 - 2 private data
 - 2 public methods (declarations only, not definitions)

11

Classes

- members are accessed through _____

```
1 rect.set_values (3,4);
2 myarea = rect.area();
```

- _____ methods can be accessed directly using . operator
 - similar to struct's

12

Classes

- example

```
1 // classes example
2 #include <iostream>
3 using namespace std;
4
5 class Rectangle {
6     int width, height;
7     public:
8     void set_values (int,int);
9     int area() {return width*height;}
10 };
11
12 void Rectangle::set_values (int x, int y) {
13     width = x;
14     height = y;
15 }
16
17 int main () {
18     Rectangle rect;
19     rect.set_values (3,4);
20     cout << "area: " << rect.area();
21     return 0;
22 }
```

notes:

- declaration vs. definition
- inline function
- encapsulation
- data hiding

- output

area: 12

13

Classes

- example with 2 variables

```
1 // example: one class, two objects
2 #include <iostream>
3 using namespace std;
4
5 class Rectangle {
6     int width, height;
7     public:
8     void set_values (int,int);
9     int area () {return width*height;}
10 };
11
12 void Rectangle::set_values (int x, int y) {
13     width = x;
14     height = y;
15 }
16
17 int main () {
18     Rectangle rect, rectb;
19     rect.set_values (3,4);
20     rectb.set_values (5,6);
21     cout << "rect area: " << rect.area() << endl;
22     cout << "rectb area: " << rectb.area() << endl;
23     return 0;
24 }
```

notes:

- each object has its own set of data/methods
- no parameters needed for call to area

- output

rect area: 12
rectb area: 30

14

Classes

- what would happen if we called `area` before setting values?

- undetermined result
- constructors
 - automatically called when a new object is _____
 - initializes values, allocates _____, etc.
 - constructor name same as class name
 - no return type
 - cannot be called _____

15

Classes

- example

```
1 // example: class constructor
2 #include <iostream>
3 using namespace std;
4
5 class Rectangle {
6     int width, height;
7     public:
8     Rectangle (int,int);
9     int area () {return (width*height);}
10 };
11
12 Rectangle::Rectangle (int a, int b) {
13     width = a;
14     height = b;
15 }
16
17 int main () {
18     Rectangle rect (3,4);
19     Rectangle rectb (5,6);
20     cout << "rect area: " << rect.area() << endl;
21     cout << "rectb area: " << rectb.area() << endl;
22     return 0;
23 }
```

notes:

- results same as before
- `set_values` omitted
- values passed to constructor

- output

rect area: 12
rectb area: 30

16

Classes

- constructors can be _____
 - different number of parameters
 - different parameter types
- _____ default constructor defined if no other constructor defined
 - takes no parameters
 - called when object is declared but no parameters are passed to the constructor
 - cannot call default constructor with parentheses
 - represents a _____ declaration

```
1 Rectangle rectb; // ok, default constructor called
2 Rectangle rectc(); // oops, default constructor NOT called
```

17

Classes

- member initialization
 - can be done in constructor body or member _____

```
1 class Rectangle {
2     int width,height;
3     public:
4     Rectangle(int,int);
5     int area() {return width*height;}
6 };
```

- _____ can be defined normally

```
Rectangle::Rectangle (int x, int y) { width=x; height=y; }
```

- or with member initialization

```
Rectangle::Rectangle (int x, int y) : width(x) { height=y; }
```

```
Rectangle::Rectangle (int x, int y) : width(x), height(y) { }
```

18

Classes

- for _____ types, doesn't matter if initialization is defined or by default
- for member objects (whose type is a _____)
 - if not initialized after the colon, they are default-constructed
 - default construction may not be possible if no default constructor defined for class
 - use member initialization list instead

19

Classes

- example

```
1 // member initialization
2 #include <iostream>
3 using namespace std;
4
5 class Circle {
6     double radius;
7     public:
8     Circle(double r) : radius(r) {}
9     double area() {return radius*radius*3.14159265;}
10 };
11
12 class Cylinder {
13     Circle base;
14     double height;
15     public:
16     Cylinder(double r, double h) : base (r), height(h) {}
17     double volume() {return base.area() * height;}
18 };
19
20 int main () {
21     Cylinder foo (10,20);
22
23     cout << "foo's volume: " << foo.volume() << '\n';
24     return 0;
25 }
```

Cylinder class has member of type class Circle and needs to call Circle constructor in member initialization list

20

Classes

- operator overloading
 - allows operators, such as + or *, to be defined for user-defined types
 - defined like member functions, but prepended with keyword **operator**

Overloadable operators												
+	-	*	/	=	<	>	+=	-=	*=	/=	<<	>>
<<=	>>=	==	!=	<=	>=	++	--	%	&	^	!	
~	&=	^=	=	&&		%=	[]	()	,	->*	->	new
delete		new[]		delete[]								

21

Classes

- operator overloading example

```
1 // overloading operators example
2 #include <iostream>
3 using namespace std;
4
5 class CVector {
6 public:
7     int x,y;
8     CVector () {}
9     CVector (int a,int b) : x(a), y(b) {}
10    CVector operator + (const CVector&);
11 };
12
13 CVector CVector::operator+ (const CVector& param) {
14     CVector temp;
15     temp.x = x + param.x;
16     temp.y = y + param.y;
17     return temp;
18 }
19
20 int main () {
21     CVector foo (3,1);
22     CVector bar (1,2);
23     CVector result;
24     result = foo + bar;
25     cout << result.x << ',' << result.y << '\n';
26     return 0;
27 }
```

example: equivalent

```
1 c = a + b;
2 c = a.operator+ (b);
```

22

Classes

- **this**
 - pointer to _____
 - used within a class method to refer to the object that called it

- example

```
Rectangle::Rectangle (int width, int height) {
    this -> width = width;
    this -> height = height;
}
```

23

Classes

- templates
 - parameterized class

```
1 template <class T>
2 class mypair {
3     T values [2];
4 public:
5     mypair (T first, T second)
6     {
7         values[0]=first; values[1]=second;
8     }
9 };
```

- can be used to store elements of type **int**

```
mypair<int> myobject (115, 36);
```

- or type **float**

```
mypair<double> myfloats (3.0, 2.18);
```

24

Classes

- destructor
 - opposite of constructor
 - called when an object's _____ ends
 - performs _____, such as memory deallocation
 - returns nothing, not even void
 - name same as class name, but preceded by ~
 - implicit default destructor provided if none defined

25

Classes


- destructor example

```
1 // destructors
2 #include <iostream>
3 #include <string>
4 using namespace std;
5
6 class Example4 {
7     string* ptr;
8     public:
9         // constructors:
10        Example4() : ptr(new string) {}
11        Example4 (const string& str) : ptr(new string(str)) {}
12        // destructor:
13        ~Example4 () {delete ptr;}
14        // access content:
15        const string& content() const {return *ptr;}
16 };
17
18 int main () {
19     Example4 foo;
20     Example4 bar ("Example");
21
22     cout << "bar's content: " << bar.content() << '\n';
23     return 0;
24 }
```

26

Inheritance

- inheritance
 - allows classes to be _____
 - _____ classes retain characteristics of the base class
 - avoids replicated code by allowing common properties to be contained in one class and then used by other classes

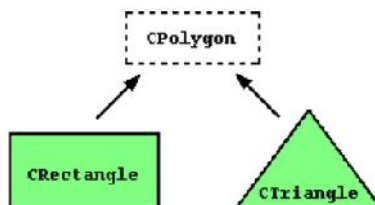

- **Polygon** contains common members; **Rectangle** and **Triangle** contain common members plus specific features

27

Inheritance

- inheritance example

- derived classes contain

width, height,
set_values

- output

```
20
10|
```

```
1 // derived classes
2 #include <iostream>
3 using namespace std;
4
5 class Polygon {
6     protected:
7     int width, height;
8     public:
9     void set_values (int a, int b)
10        { width=a; height=b;}
11 };
12
13 class Rectangle: public Polygon {
14     public:
15     int area ()
16        { return width * height; }
17 };
18
19 class Triangle: public Polygon {
20     public:
21     int area ()
22        { return width * height / 2; }
23 };
24
25 int main () {
26     Rectangle rect;
27     Triangle trgl;
28     rect.set_values (4,5);
29     trgl.set_values (4,5);
30     cout << rect.area() << '\n';
31     cout << trgl.area() << '\n';
32     return 0;
33 }
```

28

Inheritance

-inheritance

-access types and inheritance

Access	public	protected	private
members of the same class	yes	yes	yes
members of derived class	yes	yes	no
not members	yes	no	no

-inherited members have same access permissions as in base class

```
1 Polygon::width // protected access
2 Rectangle::width // protected access
3
4 Polygon::set_values() // public access
5 Rectangle::set_values() // public access
```

since

```
class Rectangle: public Polygon { /* ... */ }
```

29

Virtual Methods

-virtual methods

-can be redefined in _____ classes, while preserving its calling signature

-declared with keyword **virtual**

30

Virtual Methods

-virtual method example

```
1 // virtual members
2 #include <iostream>
3 using namespace std;
4
5 class Polygon {
6     protected:
7         int width, height;
8     public:
9         void set_values (int a, int b)
10            { width=a; height=b; }
11         virtual int area ()
12            { return 0; }
13 };
14
15 class Rectangle: public Polygon {
16     public:
17         int area ()
18            { return width * height; }
19 };
20
21 class Triangle: public Polygon {
22     public:
23         int area ()
24            { return (width * height / 2); }
25 };
```

```
27 int main () {
28     Rectangle rect;
29     Triangle trgl;
30     Polygon poly;
31     Polygon * ppoly1 = &rect;
32     Polygon * ppoly2 = &trgl;
33     Polygon * ppoly3 = &poly;
34     ppoly1->set_values (4,5);
35     ppoly2->set_values (4,5);
36     ppoly3->set_values (4,5);
37     cout << ppoly1->area() << '\n';
38     cout << ppoly2->area() << '\n';
39     cout << ppoly3->area() << '\n';
40     return 0;
41 }
```

area declared virtual –
derived classes will
redefine it

```
20
10
0
```

31

Virtual Methods

-virtual methods

-if **virtual** keyword removed, all derived class calls to **area** method through pointers to base class would return 0

-virtual methods redefined in derived classes

-non-virtual methods can also be redefined in derived classes

-but, if virtual, a _____ to the base class can access the redefined virtual method in the derived class

-a class that declares or inherits a virtual function is _____

-note that **Poly** is a class, too, and objects can be declared with it

32

Virtual Methods

- abstract base class
 - similar to base class in previous example
 - can only be used as base classes
 - can have virtual methods without _____
 - pure virtual function
 - appended with =0

33

Classes

- abstract base class

```
1 // abstract class CPolygon
2 class Polygon {
3     protected:
4         int width, height;
5     public:
6         void set_values (int a, int b)
7             { width=a; height=b; }
8         virtual int area () =0;
9     };
```

- cannot be used to declare _____

```
Polygon mypolygon; // not working if Polygon is abstract base class
```

- can be used to create _____ to it and take advantage of polymorphic features

```
1 Polygon * ppoly1;
2 Polygon * ppoly2;
```

34

Inheritance

- abstract base class example

```
1 // abstract base class
2 #include <iostream>
3 using namespace std;
4
5 class Polygon {
6     protected:
7         int width, height;
8     public:
9         void set_values (int a, int b)
10            { width=a; height=b; }
11         virtual int area (void) =0;
12 };
13
14 class Rectangle: public Polygon {
15     public:
16         int area (void)
17            { return (width * height); }
18 };
19
20 class Triangle: public Polygon {
21     public:
22         int area (void)
23            { return (width * height / 2); }
24 };
```

```
20 int main () {
21     Rectangle rect;
22     Triangle trgl;
23     Polygon * ppoly1 = &rect;
24     Polygon * ppoly2 = &trgl;
25     ppoly1->set_values (4,5);
26     ppoly2->set_values (4,5);
27     cout << ppoly1->area() << '\n';
28     cout << ppoly2->area() << '\n';
29     return 0;
30 }
```

```
20
10
```

35